




## NTN Bearing de Mexico, S.A.

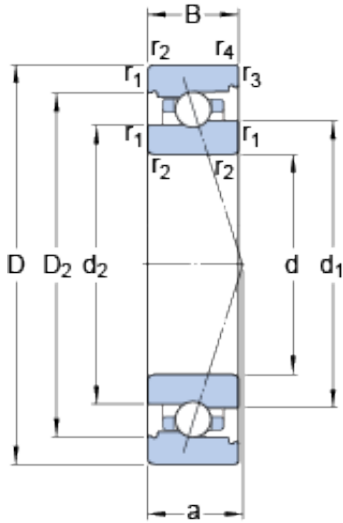

### 55 mm x 90 mm x 18 mm SKF 7011 CB/P4A angular contact ball bearings

Bearing No. 7011 CB/P4A

7011 CB/P4A Bearing 2D drawings and 3D CAD models

Size	90x55x18 mm
Bore Diameter	90 mm
Outer Diameter	55 mm
Width	18 mm
d	55 mm
D	90 mm
B	18 mm
d <sub>1</sub>	68.18 mm
d <sub>2</sub>	66.65 mm
D <sub>2</sub>	79.39 mm
r <sub>1,2</sub> - min.	1.1 mm
r <sub>3,4</sub> - min.	0.6 mm
a	18.8 mm
d <sub>a</sub> - min.	61 mm
d <sub>b</sub> - min.	61 mm
D <sub>a</sub> - max.	84 mm
D <sub>b</sub> - max.	86.8 mm
r <sub>a</sub> - max.	1 mm
r <sub>b</sub> - max.	0.6 mm
d <sub>n</sub>	69.2 mm
Basic dynamic load rating - C	14 kN
Basic static load rating - C <sub>0</sub>	11 kN
Fatigue load limit - P <sub>u</sub>	0.465 kN
Limiting speed for grease	22000 r/min



## NTN Bearing de Mexico, S.A.

Lubrication	
Limiting speed for oil lubrication	32000 mm/min
Ball - $D_w$	6.747 mm
Ball - $z$	26
$G_{ref}$	4.69 cm <sup>3</sup>
Calculation factor - $f_0$	9.7
Preload class A - $G_A$	46 N
Preload class B - $G_B$	92 N
Preload class C - $G_C$	275 N
Calculation factor - $f$	1.06
Calculation factor - $f$	1
Calculation factor - $f_{2A}$	1
Calculation factor - $f_{2B}$	1.02
Calculation factor - $f_{2C}$	1.05
Calculation factor - $f_{HC}$	1
Preload class A	38 N/micron
Preload class B	50 N/micron
Preload class C	80 N/micron
$d_1$	68.18 mm
$d_2$	66.65 mm
$D_2$	79.39 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
$d_a$ min.	61 mm
$d_b$ min.	61 mm
$D_a$ max.	84 mm
$D_b$ max.	86.8 mm
$r_a$ max.	1 mm
$r_b$ max.	0.6 mm
$d_n$	69.2 mm



## NTN Bearing de Mexico, S.A.

Basic dynamic load rating C	18.6 kN
Basic static load rating $C_0$	19 kN
Fatigue load limit $P_u$	0.465 kN
Attainable speed for grease lubrication	22000 r/min
Attainable speed for oil-air lubrication	32000 r/min
Ball diameter $D_w$	6.747 mm
Number of balls z	26
Reference grease quantity $G_{ref}$	4.69 cm <sup>3</sup>
Preload class A $G_A$	46 N
Static axial stiffness, preload class A	38 N/ $\mu$ m
Preload class B $G_B$	92 N
Static axial stiffness, preload class B	50 N/ $\mu$ m
Preload class C $G_C$	275 N
Static axial stiffness, preload class C	80 N/ $\mu$ m
Calculation factor f	1.06
Calculation factor $f_1$	1
Calculation factor $f_{2A}$	1
Calculation factor $f_{2B}$	1.02
Calculation factor $f_{2C}$	1.05
Calculation factor $f_{HC}$	1
Calculation factor $f_0$	9.7
Mass bearing	0.42 kg